



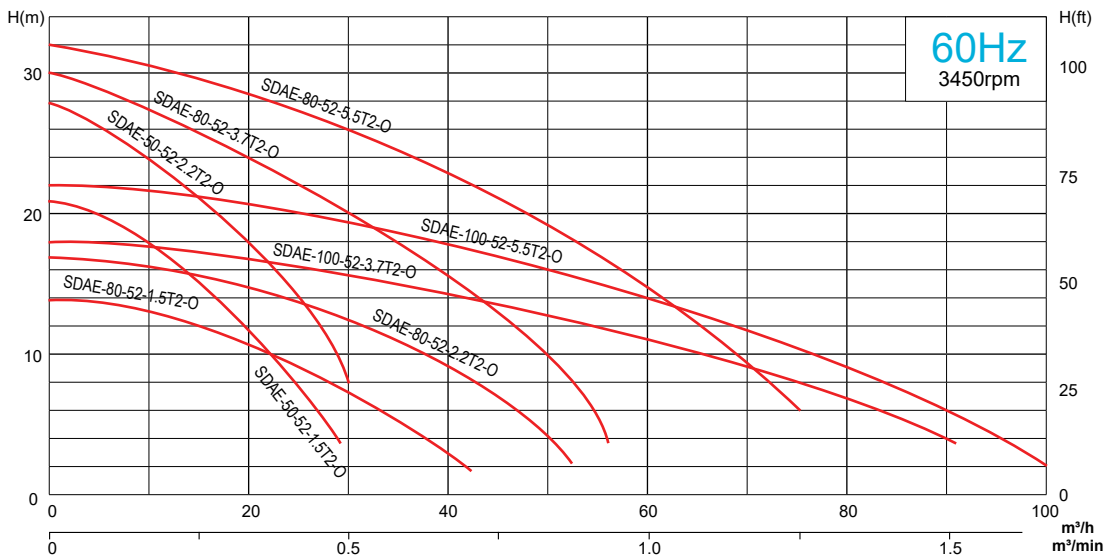

Performance Curves

SDAE Series

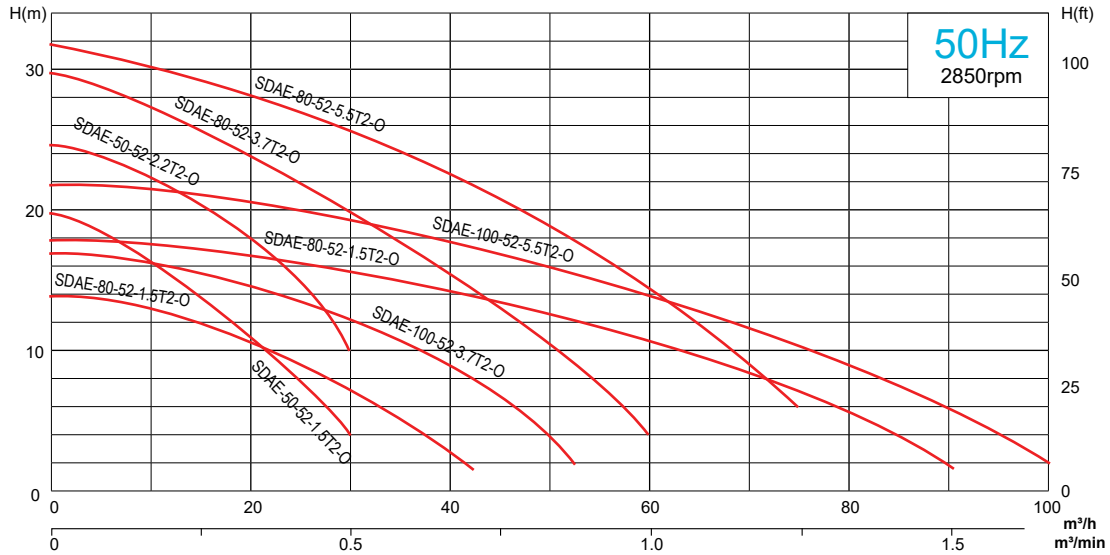

Model (50/60Hz)	Outlet	Motor Power		Rated Current	Rated Capacity		Rated Head	Max Capacity		Max Head	Impeller Passage
	mm	kW	HP	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
SDAE-50-52-1.5T2-O	50	1.5	2	3.5	15	0.25	15	30/27	0.50/0.45	20/21	10
SDAE-80-52-1.5T2-O	80	1.5	2	3.5	30	0.5	7	42	0.7	14	10
SDAE-50-52-2.2T2-O	50	2.2	3	5.0/5.1	18	0.3	19	30	0.50	25/28	10
SDAE-80-52-2.2T2-O	80	2.2	3	5.0/5.1	36	0.6	11	52	0.88	17	10
SDAE-80-52-3.7T2-O	80	3.7	5	7.7/8.0	30	0.5	20	60/55	1.0/0.92	30	10
SDAE-100-52-3.7T2-O	100	3.7	5	7.7/8.0	60	1.0	11	90	1.50	18	10
SDAE-80-52-5.5T2-O	80	5.5	7.5	11.4/11.6	36	0.6	24	74	1.23	32	10
SDAE-100-52-5.5T2-O	100	5.5	7.5	11.4/11.6	60	1.0	14	100	1.67	22	10

AQUA00005

Exclusively Distributed by

• mtp.com.au • sales@mtp.com.au • 1800 733 687

