



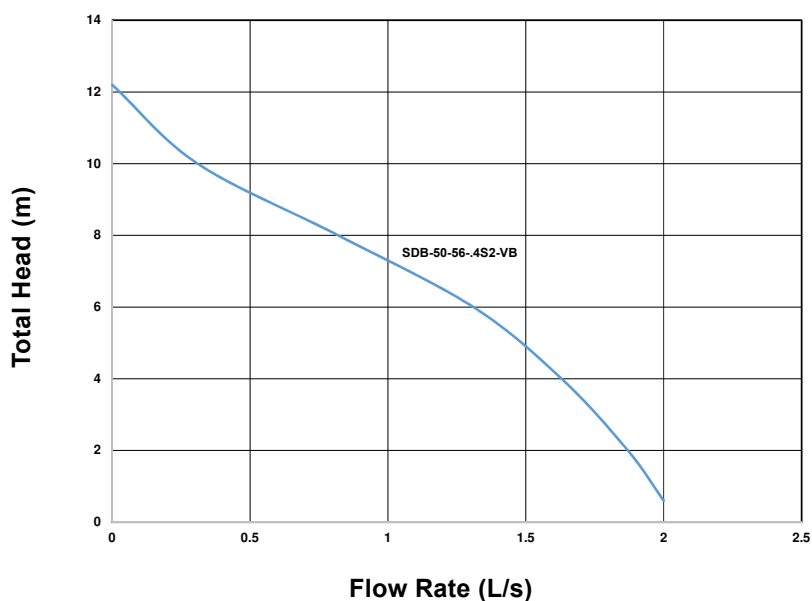

Performance Curves

SDB Series - Heavy Duty Submersible Dewatering Pumps 240 V

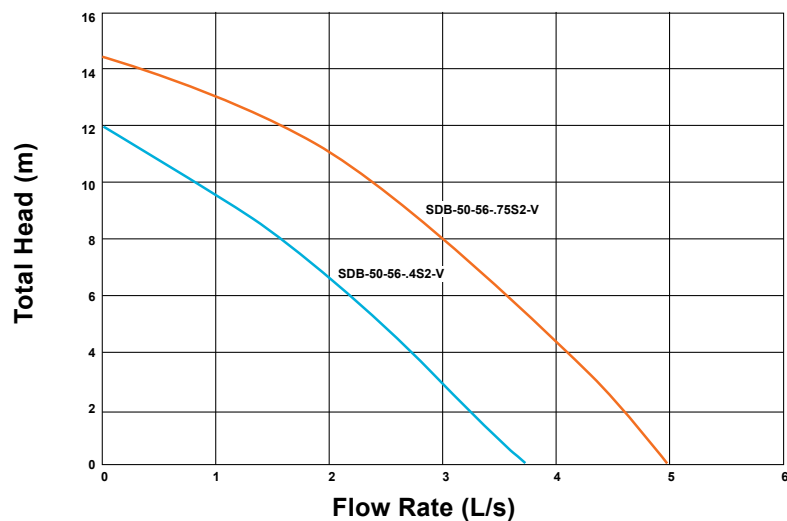

Performance Table

Model Number	Discharge (mm)	Power (kW)	Voltage (V)	Cable (m)	Max Flow (L/s)	Shut-off Head (m)	Pump Weight (kg)	Max Solid (mm)	Rated current A (240 V)	IP rating to 5 mtrs
Manual										
SDB-50-56-.4S2-10MP-V	50	0.4	240	10	3.6	12	12	7	2.6	68
SDB-50-56-.75S2-10MP-V	50/80	0.75	240	10	5	14	14	7	4.6	68
SDB-50-56-.4S2-10MP-VB	50	0.4	240	10	2	12	12	3	2.6	68
Automatic										
SDB-50-56-.4S2-10AP-V	50	0.4	240	10	3.6	12	12	7	2.6	68
SDB-50-56-.75S2-10AP-V	50/80	0.75	240	10	5	14	14	7	4.6	68

AQUA165