


## Dimensions

### SDLW – Submersible Drainage Pump

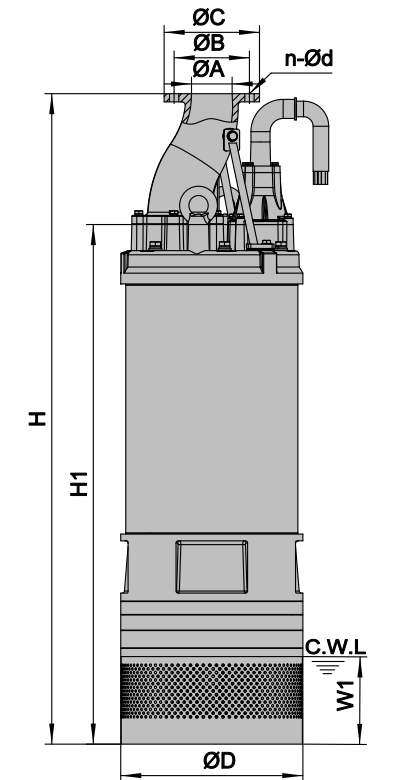

C.W.L.:Continuous running water level

Model (50/60Hz)	A	B	C	n-Ød	D	H	H1	W1	N.W	G.W	Packing Dimension
	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	mm
SDLW-50-52-3.0T2-C	50	125	165	4-Ø17.5	185	685	570	146	58	63	740x220x285
SDLW-50-52-5.5T2-C	50	125	165	4-Ø17.5	242	788	616	170	100	107	845x275x355
SDLW-80-52-11T2-C	80	160	200	8-Ø17.5	275	1036	824	210	160	172	1085x310x415
SDLW-80-52-22T2-C	80	160	200	8-Ø17.5	330	1174	914	260	315	345	1300x400x555
SDLW-100-52-37T2-C	100	180	220	8-Ø17.5	420	1500	1198	227	500	540	1625x465x705
SDLW-150-52-110T2-C	150	250	300	8-Ø26	592	1793	1388	370	1245	1301	1935x665x965