

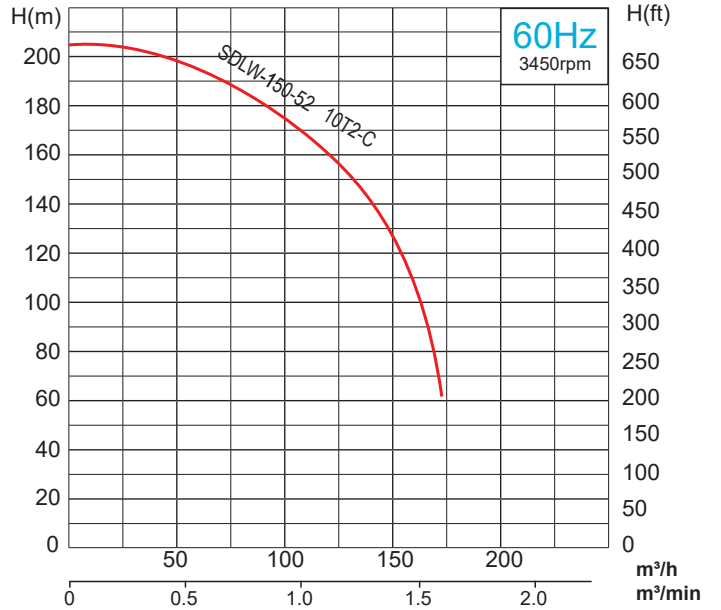
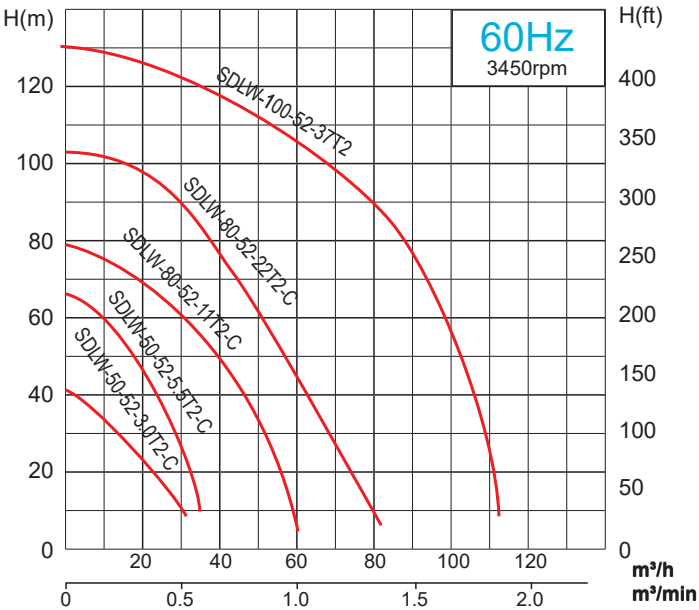


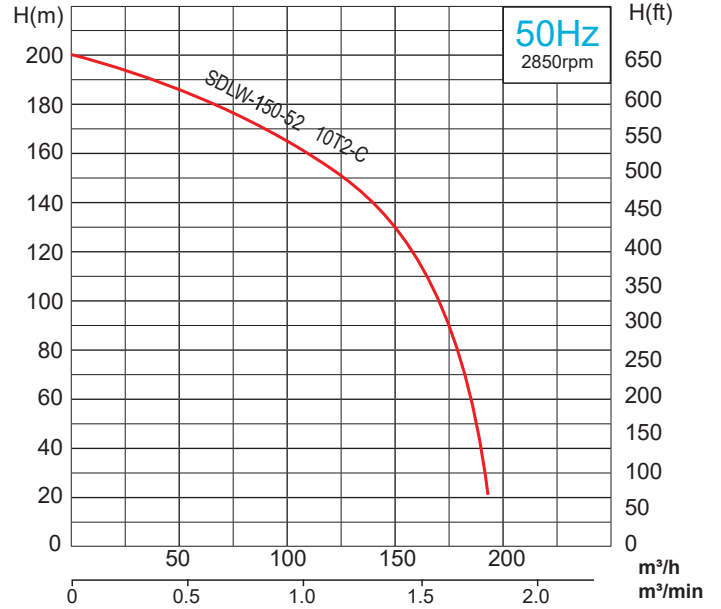

Performance Curves

SDLW – Submersible Drainage Pump

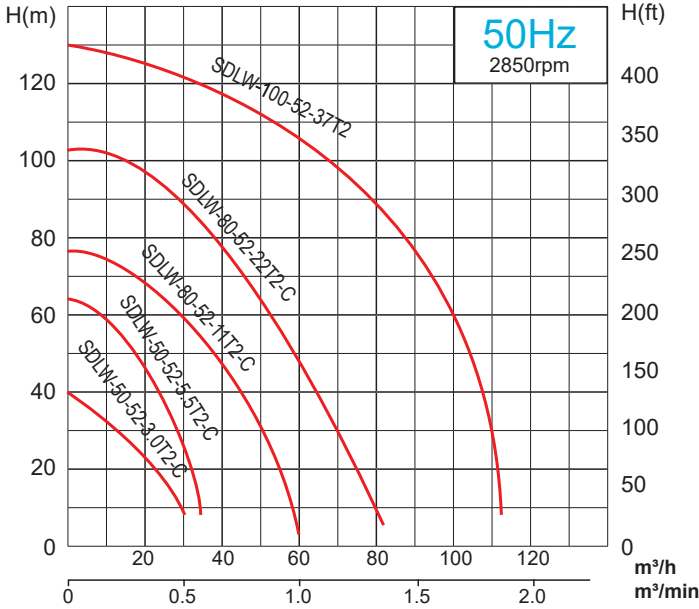

Model (50/60Hz)	Outlet mm	Motor Power		Starting Method	Rated Current A	Rated Capacity		Rated Head m	Max Capacity		Max Head m	Impeller Passage mm
		kW	HP			m³/h	m³/min		m³/h	m³/min		
SDLW-50-52-3.0T2-C	50	3.0	4.0	D.O.L.	6.5	18	0.3	26	30	0.5	39	6
SDLW-50-52-5.5T2-C	50	5.5	7.5	D.O.L.	11.4	18	0.3	48	35	0.59	65	6
SDLW-80-52-11T2-C	80	11	15	D.O.L.	22	30	0.5	60	60	1.0	78	8.5
SDLW-80-52-22T2-C	80	22	30	Star-Delta	41.5	40.2	0.67	80	81	1.35	102	8.5
SDLW-100-52-37T2-C	100	37	50	Star-Delta	66	60	1.0	105	112	1.87	130	6
SDLW-150-52-110T2-C	150	110	150	Star-Delta	198	120	2.0	150/160	192/171	3.2/2.85	200/205	8

Exclusively Distributed by

• mtp.com.au • sales@mtp.com.au • 1800 733 687

